

Mk2 Junior cleat range Nylon and Aluminium

- Small, neat and lightweight for 3 - 6mm $\frac{1}{8}$ " - $\frac{1}{4}$ " rope.
- Advanced tooth technology to hold all types of small rope.
- Can be fixed with standard screws and rivets, on tubular or flat surfaces.

Some Applications - Window blinds (cord control). Canoes (seat & rudder lines). Control lines on dinghies. Kitesurfing (Brake Line adjustment).

Open Cleat




Aluminium or Nylon

Compact to fit into small locations.
Ideal when a rope is not always cleated.

Fairlead Cleat



Aluminium or Nylon




Fairlead strengthens cleat and allows quick fine adjustments of the rope.
Helps hold rope into teeth when a line is flogging.

Fairlead Cleat with Becket



Aluminium only



Becket allows 2:1 rigging.

Side entry Cleat



Aluminium only


1. Rope runs free
Keeper is closed to stop rope going into cleat teeth



2. Pull rope back and down to cleat
Keeper opens to allow rope into teeth



3. Rope gripped
Keeper holds rope in cleat




4. Lift up to release
Keeper opens to allow rope out of teeth



Cage allows easy cleating at extreme angles.



Tapered Pad allows correct alignment.
Cleats can be mounted either way round.
Backplate provides support on thin deck sections.



Clamcleats Limited Watchmead Welwyn Garden City Hertfordshire AL7 1AP England
Telephone 01707 330101 Fax 01707 321269 e-mail sales@clamcleat.com
www.clamcleat.com

Schiffsausrüster
TOPLICHT
Tel.: +49 (0)40 - 88 90 100
www.toplicht.de

Mk2 Junior cleat range Nylon and Aluminium

Material Selection

Nylon cleats offer very good value for money and are ideal where high loads or rope surges are not likely to be encountered.

Aluminium cleats are unaffected by the heat generated by a rope surging back through a cleat. Suitable for sub-zero temperatures. Good corrosion resistance.

The **Hard Anodised (AN)** finish gives a high-tech and fashionable appearance as well as offering superior resistance to sea water corrosion.



CL204

CL204W



CL222

CL222AN



CL272

CL272W

Available soon



CL211Mk2

CL211Mk2AN



CL211Mk2/S2

CL211Mk2/S2AN



CL217Mk2AN



CL217Mk2



CL218Mk2



CL218Mk2AN



CL815





CL817

CL819




CL802

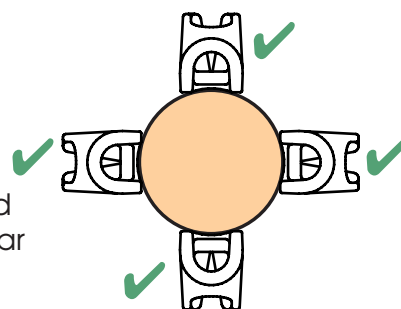

Can be fixed with standard screws and rivets, on tubular or flat surfaces.

Cleats for ropes to 6mm (1/4")


	mm Ø inch Ø	A B	C	mm Ø inch Ø	mm Ø inch Ø	mm Ø Gauge	Gms Ozs
CL204 & CL204W White Mini	3 - 6 1/8-1/4	Nylon A52 B36 C17 A2 1/16 B17/16 C11/16		3.2 1/8	#8 4 5/32	4.2 No8	9 0.3
CL211 Mk2 & CL211 Mk2AN Hard Anodised Racing Junior Mk2	3 - 6 1/8-1/4	Aluminium A55 B27 C17 A2 1/8 B11/16 C11/16		3.2 1/8	#8 4 5/32	4.2 No8	21 0.8
CL211Mk2/S2 & CL211Mk2AN/S2 Hard Anodised Racing Junior Mk2 with Becket	3 - 6 1/8-1/4	Aluminium A55 B27 C17 A2 1/8 B11/16 C11/16		3.2 1/8	#8 4 5/32	4.2 No8	21 0.8
CL217 Mk2 & CL217 Mk2AN Hard Anodised Side entry (Starboard)	3 - 6 1/8-1/4	Aluminium A55 B27 C17 A2 1/8 B11/16 C11/16		3.2 1/8	#8 4 5/32	4.2 No8	24 0.8
CL218 Mk2 & CL218 Mk2AN Hard Anodised Side entry (Port)	3 - 6 1/8-1/4	Aluminium A55 B27 C17 A2 1/8 B11/16 C11/16		3.2 1/8	#8 4 5/32	4.2 No8	24 0.8
CL222 & CL222AN Hard Anodised Racing Mini	3 - 6 1/8-1/4	Aluminium A48 B36 C15 A17/8 B17/16 C5/8		3.2 1/8	#8 4 5/32	4.2 No8	16 0.6
CL272 & CL272W White Nylon Mk2 Junior	3 - 6 1/8-1/4	Nylon A55 B27 C17 A2 1/8 B11/16 C11/16		3.2 1/8	#8 4 5/32	4.2 No8	12 0.4
CL815 Keeper for CL211 Mk2, CL211 Mk2AN, Mk2/S2, CL211 Mk2AN/S2 & CL272	3 - 6 1/8-1/4	Acetal A - B - C -		3.2 1/8	#8 4 5/32	4.2 No8	9 0.3
CL817 Cage for CL211 Mk2, CL211 Mk2AN & CL272 Requires CL815 Keeper	-	Nylon & Stainless steel A - B - C -		-	-	-	23 0.8
CL802 Tapered Pad for CL204 & CL222	3 - 6 1/8-1/4	Polypropylene A 57 B - C21 A2 1/4 B - C13/16		3.2 1/8	#8 4 5/32	4.2 No8	4 0.1
CL819 Tapered Pad for CL211 Mk2, CL217 Mk2, CL218 Mk2, CL211 Mk2/S2 & CL272	3 - 6 1/8-1/4	Polypropylene A60 B27 C23 A23/8 B11/16 C29/32		3.2 1/8	#8 4 5/32	4.2 No8	8 0.3




Standard rivet gun nozzles do not fit inside cleat.



Use 2 or 3 nuts to extend nozzle.



Extended nozzle is best
Consult rivet gun supplier.








Section 'AA'

Notes: –

For marine applications, use a silicone sealant or a bedding compound to avoid electrolytic action between the cleat and metal fastenings.

2 Holes ø4.9
countersunk ø8.5x90°.

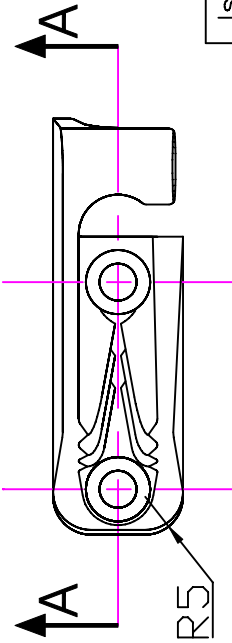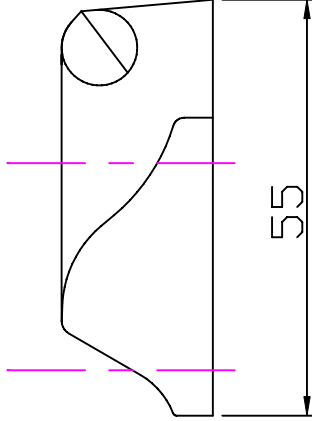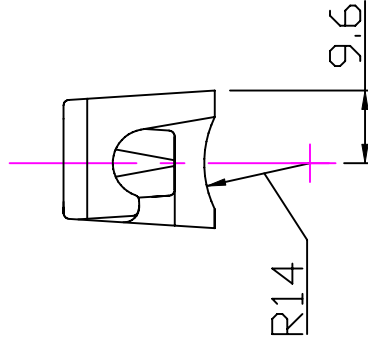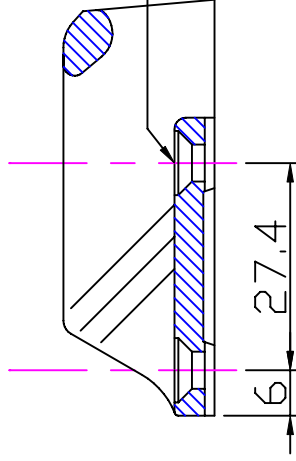

Clamcleat®
Rope cleats

Clamcleats Limited
Watchmead
Welwyn Garden City
Hertfordshire AL7 1AP
England

Telephone +44 (0)1707 330101
Fax +44 (0)1707 321269
<http://www.clamcleat-rope-cleats.com>

Telephone +44 (0)1707 330101
Fax +44 (0)1707 321269
<http://www.clamcleat-rope-cleats.com>

Scale 1:1

All dimensions in mm.

Issue: 4. May 2006

ID2172.dwg



Material:

Diecast Aluminium


Installation Drawing for: –

CL217 MK2

Side Entry Mk2
(Starboard)




M4 4/4.2mm ϕ 3-6mm
#8 (5/32") No.8 1/8" - 1/4"




Notes: -
For marine applications, use a silicone sealant or a bedding compound to avoid electrolytic action between the cleat and metal fastenings.



Standard rivet gun nozzles do not fit inside cleat.



Use 2 or 3 nuts to extend nozzle.




Extended nozzle is best
Consult rivet gun supplier.



Clamcleats Limited
Watchmead
Welwyn Garden City
Hertfordshire AL7 1AP
England
Telephone +44 (0)1707 330101
Fax +44 (0)1707 321269
<http://www.clamcleat-rope-cleats.com>

Section 'AA'

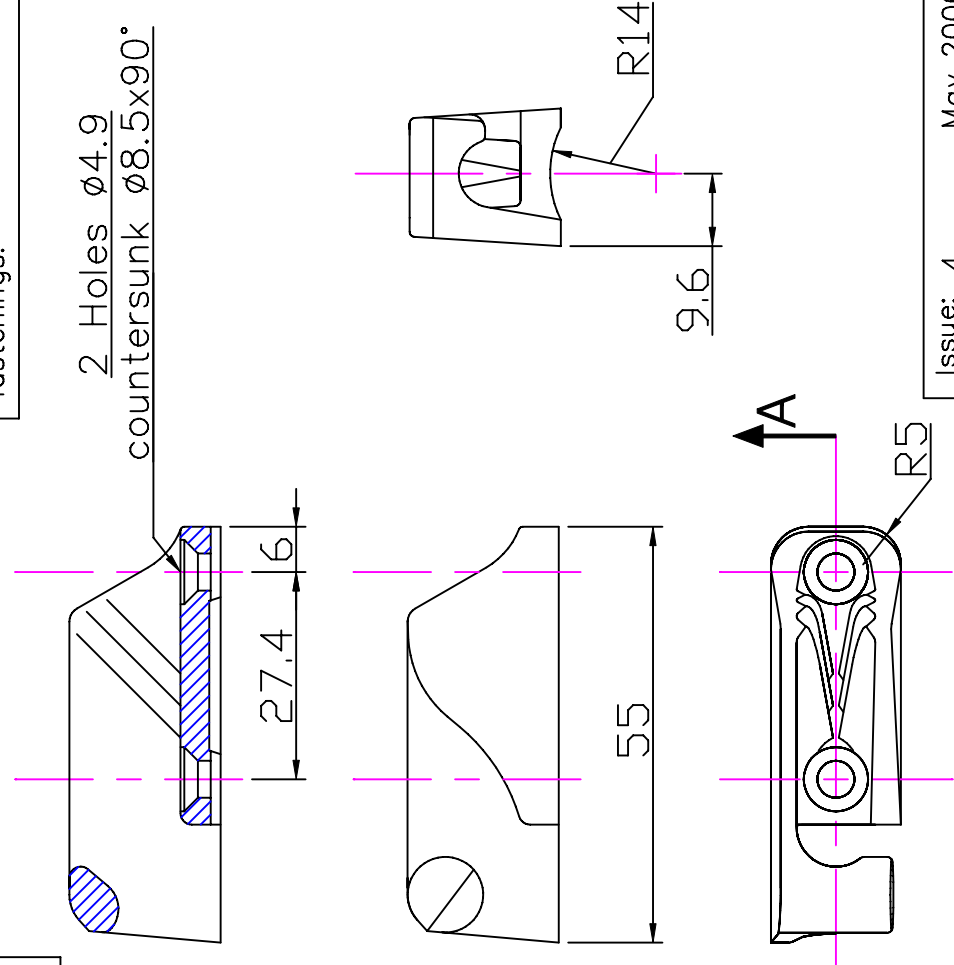

Issue: 4. May 2006
ID2182.dwg

Material:
Diecast Aluminium

Installation Drawing for: -
CL218 Mk2
Side Entry Mk2
(Port)

Scale 1:1
All dimensions in mm.