


1160

Filtro depurazione acqua serie "Tirreno" con coperchio grilamid tr55 trasparente

Water strainer "Tirreno" series with grilamid tr55 see-thru cover

Filtro omologato RINA DIP
RINA DIP certificate

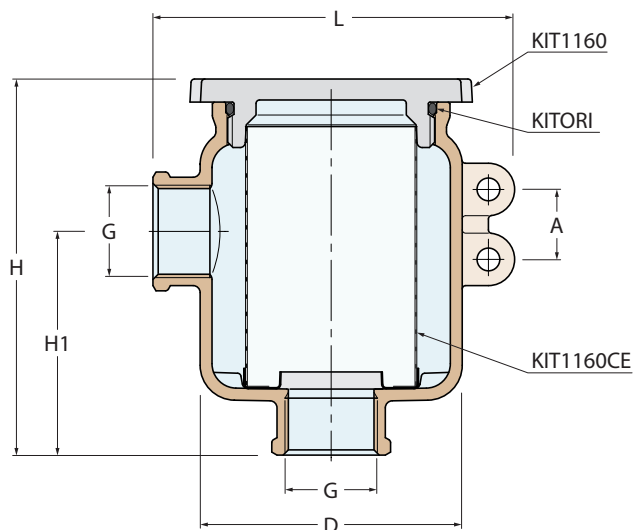

FILETTATURE / THREAD :
G = ISO 228/1 (BS 2779)

| 1160 | ■ | ■ | ■ | ■ |
|-------------|-------------|-------------|-------------|-----------|
| Weight (gr) | 870 | 840 | 800 | 915 |
| 1160B | ■ | ■ | ■ | |
| Weight (gr) | 960 | 930 | 1110 | |
| A | 20 | 20 | 20 | 30 |
| L | 104 | 104 | 104 | 106 |
| H1 | 64 | 64 | 64 | 85 |
| H | 108 | 108 | 108 | 136 |
| D | 75 | 75 | 75 | 75 |
| G | 3/8" | 1/2" | 3/4" | 1" |




Ottone nichelato
Nickel-plated brass

1160B



Bronzo
Bronze

Diagramma portate - perdite di carico
Flow rate - loss of pressure diagram

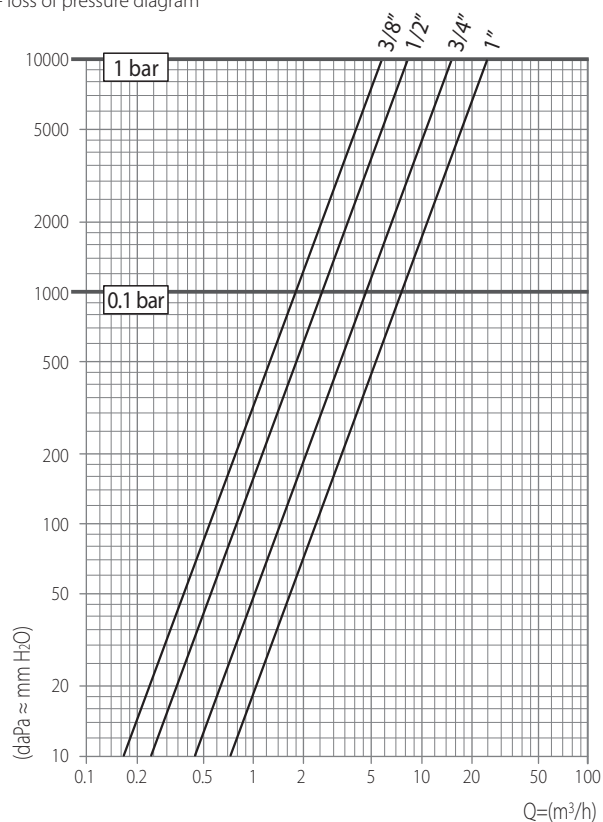

Corpo in ottone nichelato
Nickel-plated brass casing

Elemento filtrante in acciaio inox AISI 316L
AISI 316L stainless steel inside filter

Coperchio in GRILAMID TR55 trasparente
Transparent GRILAMID TR55 cover

Guarnizioni in neoprene
Neoprene o-ring

| G | 0.1 bar | 1 bar |
|------|---------|-------|
| 3/8" | 1800 | 5750 |
| 1/2" | 2550 | 8180 |
| 3/4" | 4750 | 15160 |
| 1" | 7500 | 23800 |

Portate di acqua attraverso il filtro pulito - lt/h
Flow-rate capacity through the clean filter - lt/h