


Filtro depurazione acqua serie "Mediterraneo" con coperchio in metallo
 Water strainer "Mediterraneo" series with metal cover

Filtro omologato RINA MAC
 RINA MAC certificate

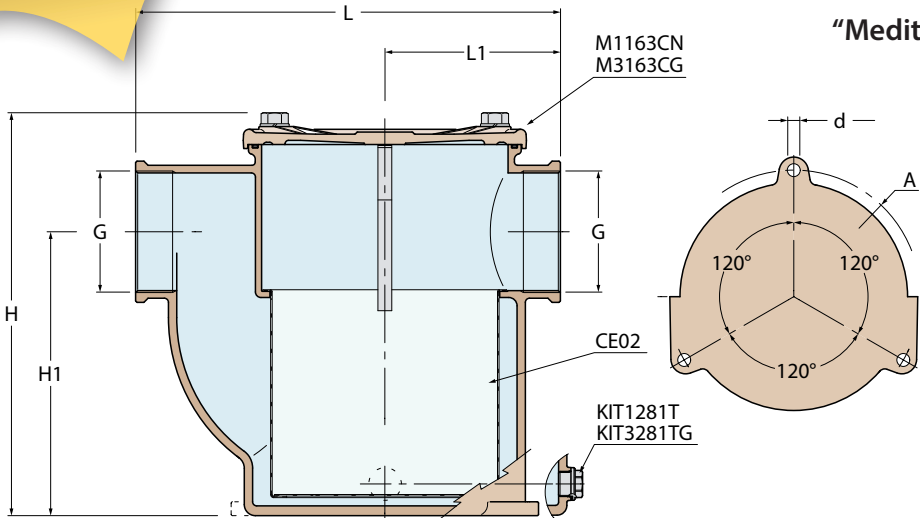

FILETTATURE / THREAD :
 G = ISO 228/1 (BS 2779)

1163	1870	1850	4000	3900	5000	6000	8200	11500	16500	22400
Weight (gr)	1870	1850	4000	3900	5000	6000	8200	11500	16500	22400
3163										
Weight (gr)			1300	1260	1520	1890	2670	3750	5380	7250
d	5	5	6.5	6.5	6.5	6.5	8.5	8.5	8.5	8.5
A	94	94	135	135	150	155	180	180	225	231
H	117	117	151	151	176	193	216	284	292	355
H1	82	82	106	106	122	135	149	210	205	256
L1	53	53	77	77	83	88	104	109	131	145
L	122	122	169	169	184	202	242	260	309	340
G	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"


Bronzo nichelato ■
 Nickel-plated bronze

3163



Alluminio anodizzato nero ■
 Black anodized aluminium

Diagramma portate - perdite di carico
 Flow rate - loss of pressure diagram

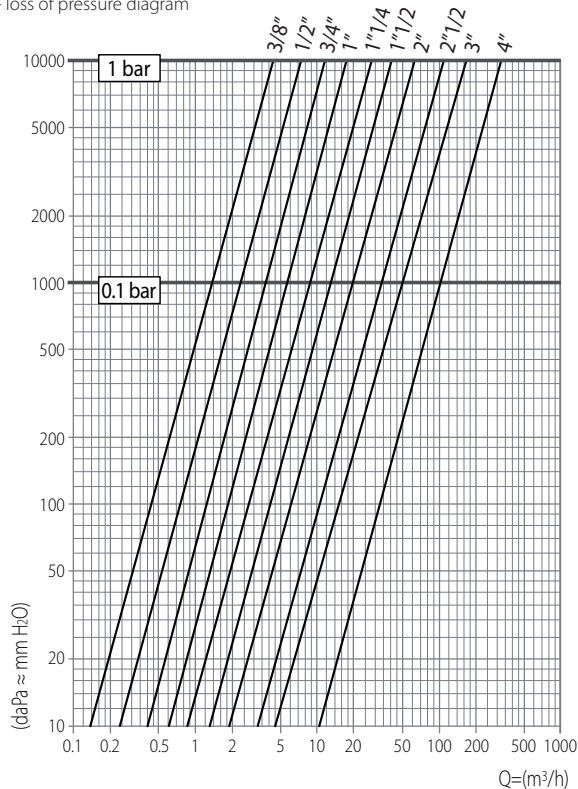

Corpo in bronzo nichelato / Alluminio anodizzato nero
 Nickel-plated bronze / Black anodized aluminium casing

Elemento filtrante in acciaio inox AISI 316L
 AISI 316L stainless steel inside filter

Coperchio in bronzo nichelato / Alluminio anodizzato nero
 Nickel-plated bronze / Black anodized aluminium cover

Guarnizioni in neoprene
 Neoprene o-ring

TOPLICHT
Art-Nr.

	G	0.1 bar	1 bar
	3/8"	1400	4300
1433-713	1/2"	2400	7500
1433-719	3/4"	3800	12000
1433-725	1"	5700	17900
1433-732	1 1/4"	8800	27700
1433-738	1 1/2"	12800	40600
1433-750	2"	19900	63000
1433-765	2 1/2"	33900	107300
1433-775	3"	50000	166730
1433-799	4"	103000	326000

Portate di acqua attraverso il filtro pulito - lt/h
 Flow-rate capacity through the clean filter - lt/h