


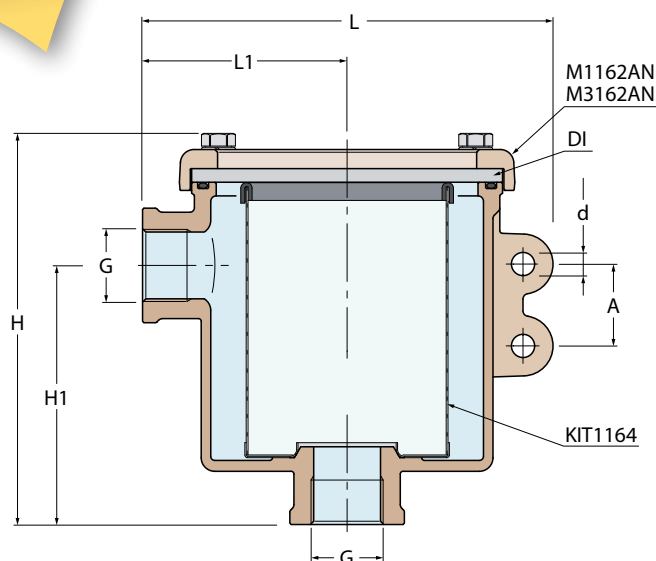

FILETTATURE / THREAD :
 G = ISO 228/1 (BS 2779)

1164	■	■	■	■	■	■	■	■
Weight (gr)	2800	2700	3400	4000	6200	9000	9600	14600
3164	■	■	■	■	■	■	■	■
Weight (gr)	970	930	1170	1380	2100	3280	3550	4800
d	8.5	8.5	8.5	8.5	10	11	11	11
A	30	30	40	40	50	60	80	100
H	145	145	168	178	215	243	276	326
H1	94	94	106	111	135	150	177	211
L1	75	75	85	91	106	126	129	142
L	151	151	167	180	213	252	255	277
G	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"

Filtro depurazione acqua serie "Ionio"
con disco in polycarbonato
 Water strainer "Ionio" series
 with polycarbonate cover

Filtro omologato RINA DIP
 RINA DIP certificate




Bronzo nichelato ■
 Nickel-plated bronze

3164



Alluminio anodizzato nero ■
 Black anodized aluminium

Diagramma portate - perdite di carico
 Flow rate - loss of pressure diagram

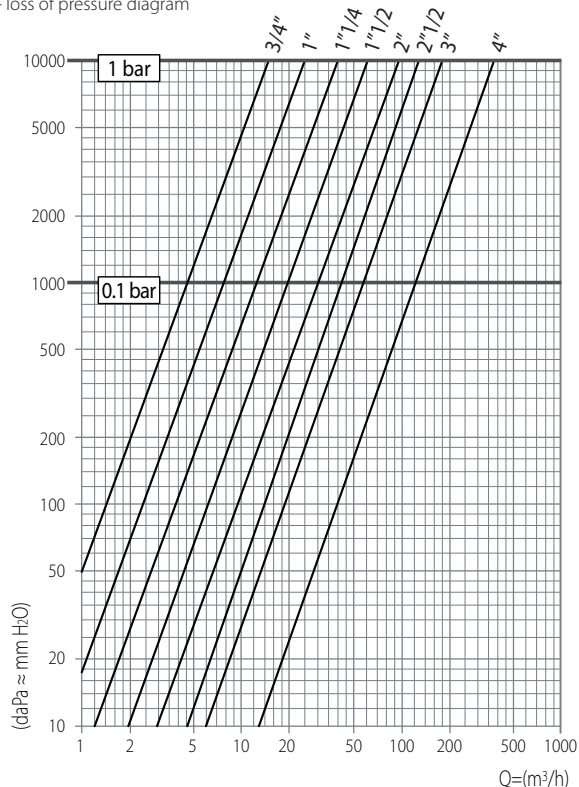

Corpo in bronzo nichelato / Alluminio anodizzato nero
 Nickel-plated bronze / Black anodized aluminium casing

Elemento filtrante in acciaio inox AISI 316L
 AISI 316L stainless steel inside filter

Disco in polycarbonato trasparente
 Transparent polycarbonate cover

Guarnizioni in neoprene
 Neoprene o-ring

TOPLICHT Art-Nr.	G	0.1 bar	1 bar
1433-319	3/4"	4650	14900
1433-325	1"	7950	25500
1433-332	1 1/4"	12100	38200
1433-338	1 1/2"	19100	61250
1433-350	2"	30000	96200
	2 1/2"	42600	134000
	3"	58400	184000
	4"	123000	390000

Portate di acqua attraverso il filtro pulito - lt/h
 Flow-rate capacity through the clean filter - lt/h