


Filtro depurazione acqua serie "Ionio"
con coperchio in metallo
 Water strainer "Ionio" series
 with metal cover


Filtro omologato RINA MAC
 RINA MAC certificate

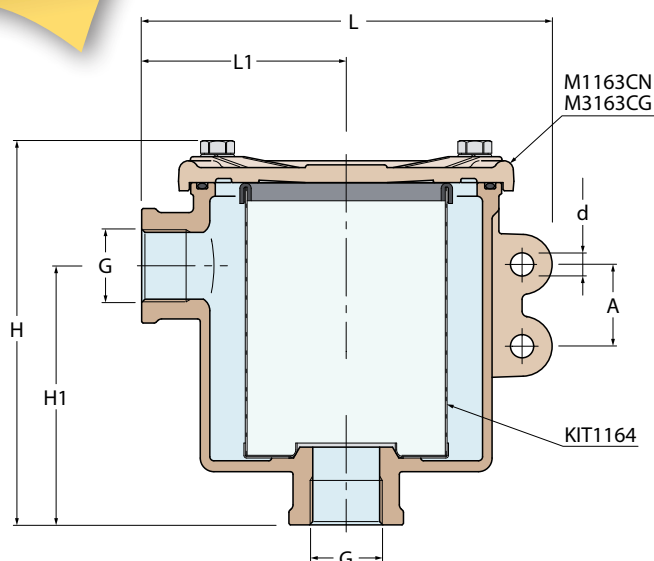

FILETTATURE / THREAD :
 G = ISO 228/1 (BS 2779)

1166	■	■	■	■	■	■	■	■
Weight (gr)	2900	2800	3600	4400	6700	10200	10800	15800
3166	■	■	■	■	■	■	■	■
Weight (gr)	1000	970	1250	1500	2100	3280	3600	4850
d	8.5	8.5	8.5	8.5	10	11	11	11
A	30	30	40	40	50	60	80	100
H	143	143	165	176	215	243	276	326
H1	94	94	106	111	135	150	177	211
L1	75	75	85	91	106	126	129	142
L	151	151	167	180	213	252	255	277
G	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"

Diagramma portate - perdite di carico
 Flow rate - loss of pressure diagram

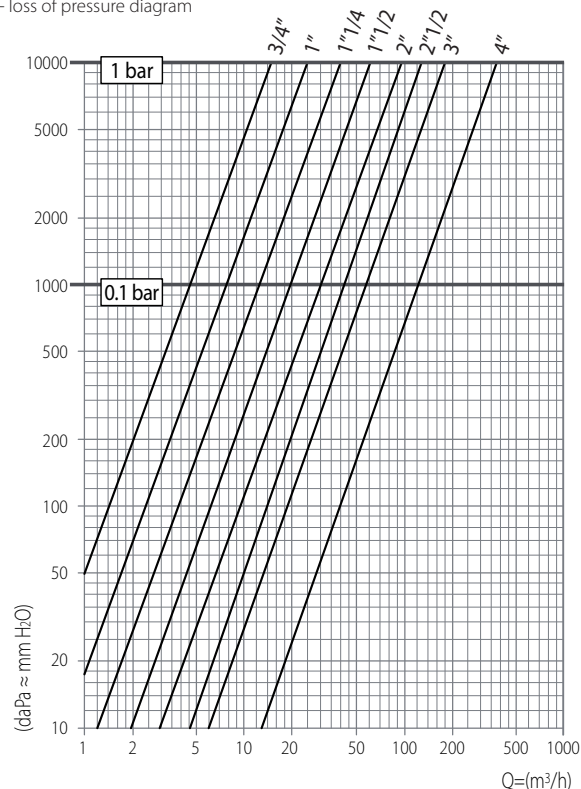

Bronzo nichelato ■
 Nickel-plated bronze

3166



Alluminio anodizzato nero ■
 Black anodized aluminium

Corpo in bronzo nichelato / Alluminio anodizzato nero
 Nickel-plated bronze / Black anodized aluminium casing

Elemento filtrante in acciaio inox AISI 316L
 AISI 316L stainless steel inside filter

Coperchio in bronzo nichelato / Alluminio anodizzato nero
 Nickel-plated bronze / Black anodized aluminium cover

Guarnizioni in neoprene
 Neoprene o-ring

TOPLICHT Art-Nr.	G	0.1 bar	1 bar
1433-419	3/4"	4650	14900
1433-425	1"	7950	25500
1433-432	1 1/4"	12100	38200
1433-438	1 1/2"	19100	61250
1433-450	2"	30000	96200
	2 1/2"	42600	134000
	3"	58400	184000
	4"	123000	390000

Portate di acqua attraverso il filtro pulito - lt/h
 Flow-rate capacity through the clean filter - lt/h