

Specially  
developed for  
mobile use.


## SOLARA S-Series

### ROBUST AND RELIABLE DEVELOPED FOR MOBILE APPLICATIONS

- Solar modules with 36/45 high-performance solar cells
- Additional solar cells for efficient charging
- Designed and manufactured for permanent use on water and on land
- Robust, seawater-resistant, torsion-resistant aluminium profile frame
- Drainage holes to prevent frost damage
- Large, waterproof junction box with connection cable, MC4 compatible
- Manufactured exclusively in Germany



## SOLARA S-Series

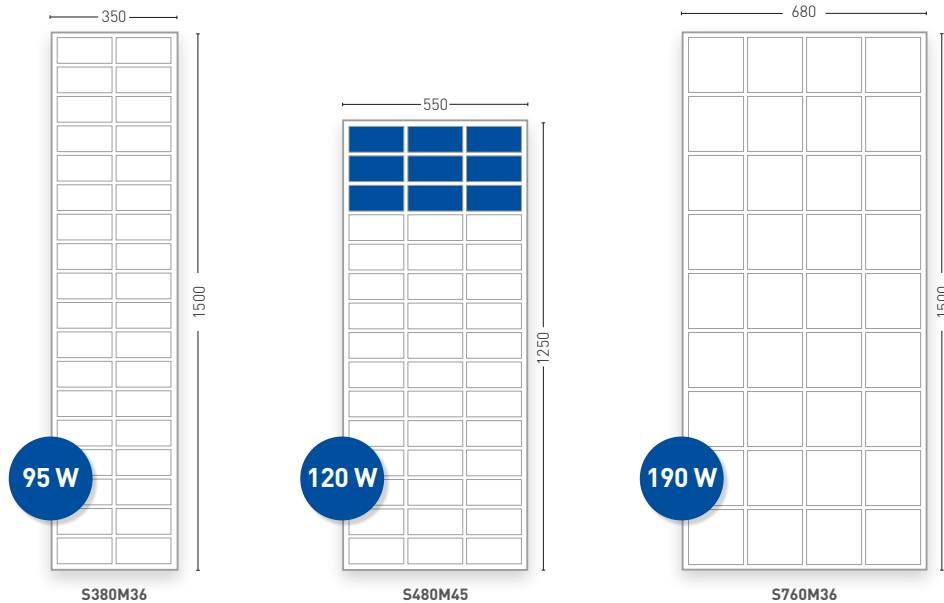

## PERFORMANCE

Type	S380M36	S480M45	S760M36
Daily output in summer in Germany (Ø) Wh/d	380	480	760
Rated output <sup>1</sup> (Pmpp) Wp	95	120	190
Short-circuit current (Isc) A	4.84	4.89	10.09
Open-circuit voltage (Uoc) V	23.96	29.94	24.14
Voltage (Umpp) V	20.50	25.65	20.13
Current (Impp) A	4.63	4.68	9.44
No. of cells	36	45	36

<sup>1</sup> Performance at STC, Standard Testing Conditions: 1000 W/m<sup>2</sup>, AM 1.5, cell temperature 25° C

## Dimensions and weight

Dimensions (L x W x H) mm	1500 x 350 x 35	1250 x 550 x 35	1500 x 680 x 35
Weight kg	7.9	6.6	10.5
Cell dimensions mm	156 x 78	156 x 78	156 x 156

## Thermal properties

TK Pmpp %/K	-0.45
TK Uoc %/K	-0.36
TK Isc %/K	0.03
NOCT °C	46 ± 2

## Used materials

Cell technology	Monocrystalline PERC
Front/back	Tempered solar glass
Frame	Anodized aluminium hollow profile, silver
Junctionbox	IP67 with MC4 compatible connectors

## More technical data

Reverse current IR loadability	12 A
Measuring accuracy Pmpp at STC	± 5 %
Operating temperature range	-40°C to +85°C
Glass thickness	3.2/2.0 mm

