



VIKING AIR

3 kW | Air Heater

Power:	950-3000 W (3,200-10,200 BTU)
Fuel:	Diesel, HVO
Operating Voltage:	12 V
Fuel Consumption:	0,10-0,30 l/t, (3.4-10 oz/h)
Electricity Consumption:	0.5-2,0 A
Air Volume at min Heat:	43 m ³ /t, (25 cfm)
Air Volume at max Heat:	121 m ³ /t, (71 cfm)
Air Boost:	227 m ³ /t, (133 cfm)
Weight:	10 kg, (22 lbs)

Wallas Viking Air is a cutting edge forced air heater with a variable heat output and a wireless temperature sensor to provide precise temperature control and superior ventilation volume. The Viking Series models are equipped with the Advanced Control Panel, which can also be operated remotely on your mobile phone. Heat sensing for the thermo control is taken from wired or wireless temperature sensors, which maintain even more precise target temperature and comfort level than the standard models. Powerful Air Boost dries the boat quickly and lets you start your day faster.

3008 ADVANCED

Thermo | Intelligent Control Panel



- Use heater in PI Thermo Control Mode to set a target temperature
- Switch to Manual Mode and control heat with six power levels (1-6) without thermostat.
- Blow fresh air in Ventilation Mode when heating is not needed.
- Air Boost Mode provides superior ventilation volume for extremely fast defrosting and drying - The highest in its class!
- Switch to High Altitude Mode when traveling in high altitudes to adjust the combustion.




Two inlets take fresh air from outside and recirculate heated air in the cabin. This improves efficiency and ensures oxygen rich air in the cabin.

Two outlets reduce air drag and keep the sound level low.

INSTALLATION

Easy installation can be done independently or by a Wallas professional.

Wireless temperature sensor monitors cabin temperature with improved accuracy and flexibility.

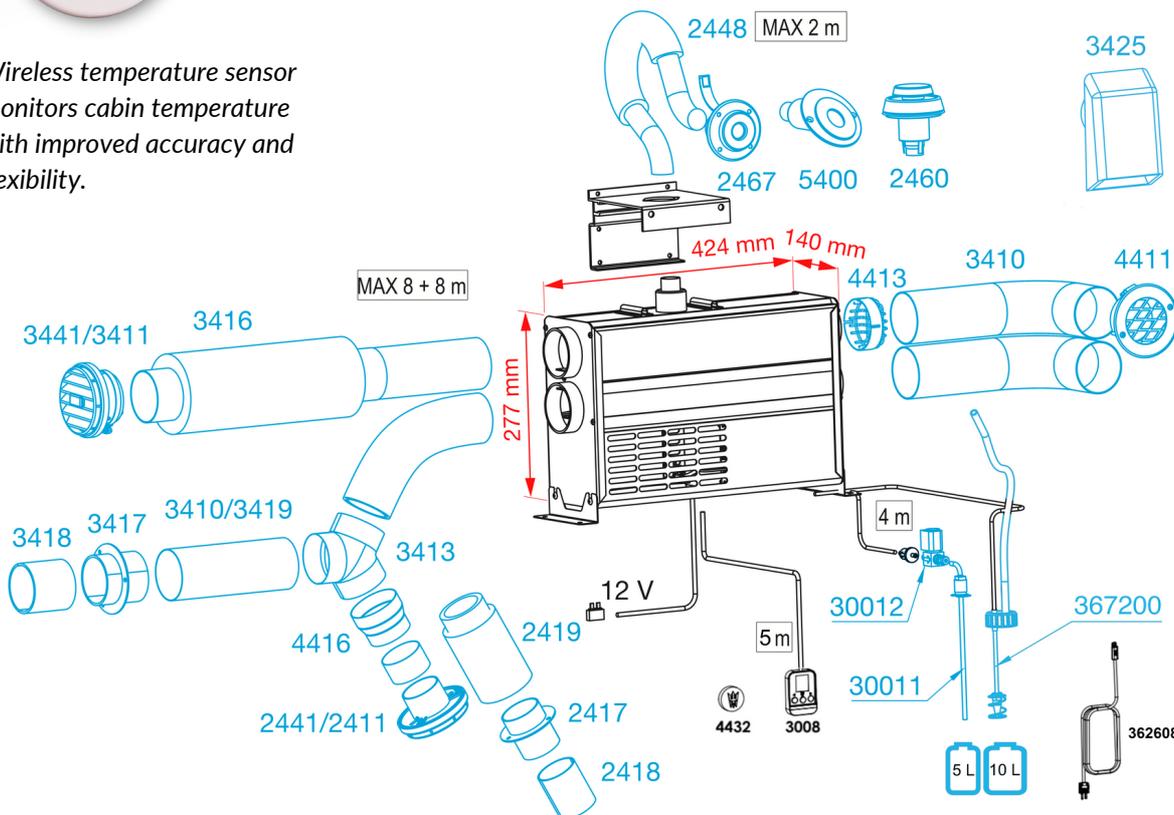

FEATURES

- Multipoint remote temperature sensing for improved accuracy.
- Two inlets and outlets allow greater installation flexibility and drying performance.
- Superior ventilation volume in Air Boost mode.
- Warranty 2+1 years.
- Variable output eliminates system cycling and reduces noise, keeping you comfortable.
- Brushless blower motors have a very long life-cycle, supporting reliably long service intervals.
- Fully enclosed laminar burning process ensures a quiet sound level and wind resistant burn.
- E-mark approved for vehicles.
- Low temperature on unit and exhaust pipe increases safety.
- Drawing fuel directly from the main tank of the vessel saves space and eliminates the need for a separate tank.
- Made of stainless steel, high-grade aluminum, and other corrosion-resistant materials.

Recommended Builds:

Boats 7-9 m (22-29 ft)
Campers: MB Sprinter, Fiat Ducato
Trailers, Containers 4-6 m, (13-19 ft)



{Accessories in black come with the standard package. Accessories in blue are additional/optional. Wallas-Marine reserves the right to change or improve its products and to make changes in the content of this brochure without obligation to notify any person or organization of such changes or improvements. Go to www.wallas.fi for current updates and supplemental information concerning these products.