

## STANDARD CRADLE

The Standard Jason's Cradle® is proven to aid in the safe and speedy recovery of man-overboard victims in the preferred horizontal position.

They are currently in service globally and are considered a vital piece of safety equipment. SOLAS Approved and guaranteed for 3 years.



### 'JASON'S CRADLE®' QUITE SIMPLY WE SAVE LIVES...

- The Standard Cradle is simply fixed to the deck or rail to enable deployment within seconds
- The Standard Cradle can be easily rolled up for stowage
- Deployment of the Cradle forms a non-collapsible scoop
- The casualty is guided into the cradle head first
- A Strop and/or Hauling lines are pulled to close the loop
- A co-ordinated & methodical lift takes place & the casualty is retrieved by rolling onto the deck in the medically preferred horizontal position
- Bespoke Standard Cradle's range from 530mm to 1050mm Wide and 2290mm to 6870mm Long

All Jason's Cradle® units carry our manufacturer warranty of 3 years excluding clips, strops, hauling lines, stowage bags and other additional fittings that carry the usual 1 year manufacturer's warranty.

### JASON'S CRADLE®:

- **Casualty Recovery**
- **Body Recovery**
- **Diver Support**
- **Boarding Ladder**


PRODUCT CODE	LENGTH	WIDTH	FREEBOARD
1MC-JCSTD04A	2290mm	710mm	Up to 1m
1MC-JCSTD04B	2860mm	710mm	1m to 1.5m
1MC-JCSTD04C	3430mm	710mm	1.5m to 2m
1MC-JCSTD04D	4000mm	710mm	2m to 2.5m
1MC-JCSTD04E	4570mm	710mm	2.5m to 3m
1MC-JCSTD04F	5140mm	710mm	3m to 3.5m
1MC-JCSTD04G	5710mm	710mm	3.5m to 4m
1MC-JCSTD04H	6290mm	710mm	4m to 4.5m
1MC-JCSTD04I	6870mm	710mm	4.5m to 5m
1MC-JCSTD05A	2290mm	880mm	Up to 1m
1MC-JCSTD05B	2860mm	880mm	1m to 1.5m
1MC-JCSTD05C	3430mm	880mm	1.5m to 2m
1MC-JCSTD05D	4000mm	880mm	2m to 2.5m
1MC-JCSTD05E	4570mm	880mm	2.5m to 3m
1MC-JCSTD05F	5140mm	880mm	3m to 3.5m
1MC-JCSTD05G	5710mm	880mm	3.5m to 4m
1MC-JCSTD05H	6290mm	880mm	4m to 4.5m
1MC-JCSTD05I	6870mm	880mm	4.5m to 5m
1MC-JCSTD06A	2290mm	1050mm	Up to 1m
1MC-JCSTD06B	2860mm	1050mm	1m to 1.5m
1MC-JCSTD06C	3430mm	1050mm	1.5m to 2m
1MC-JCSTD06D	4000mm	1050mm	2m to 2.5m
1MC-JCSTD06E	4570mm	1050mm	2.5m to 3m
1MC-JCSTD06F	5140mm	1050mm	3m to 3.5m
1MC-JCSTD06G	5710mm	1050mm	3.5m to 4m
1MC-JCSTD06H	6290mm	1050mm	4m to 4.5m
1MC-JCSTD06I	6870mm	1050mm	4.5m to 5m

## JASON'S CRADLE® TECHNICAL SPECIFICATIONS

- Rungs: - Delrin 100T High Tensile Plastic
- Centre/End Caps: - Polyethylene LDPE & HDPE
- 316 Marine Grade Stainless Steel Link Components
- Stainless Steel Fasteners Used Throughout
- Fixing Clips Breaking Load 3200kg
- SOLAS Certification
- Tensile tested in excess of one metric tonne (2,205lbs)

### JASON'S CRADLE®:

- Suitable for most vessels with up to 5m freeboard
- Available in three width options

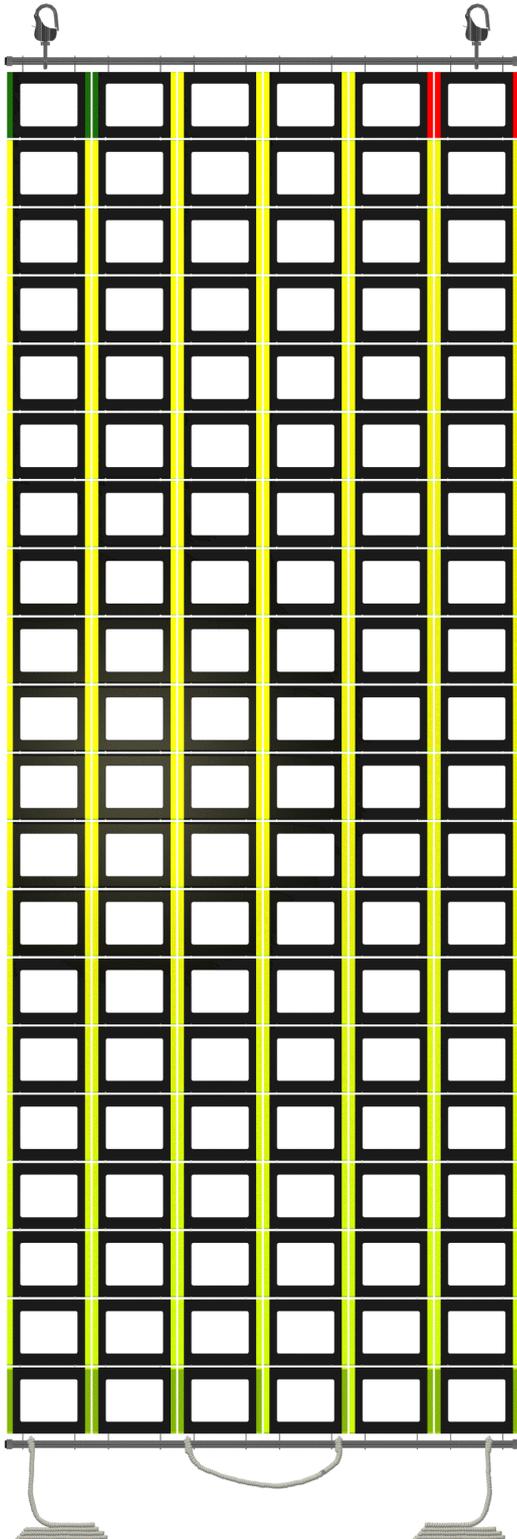

Technical Data Sheet		001
<b>TOPLICHT</b> Art-Nr. 3054-620 <b>1MC-JCSTD06B</b>		
<b>Jason's Cradle Standard (1050mm wide)</b> – 1m to 1.5m Freeboard		
L: 2,860 mm		
W: 1,050mm		
Weight: 32.8Kg		
Stowage Diameter: 390mm		
<b>Supplied as shown with snap shackles, 25" rope strop and 4 metre – 14mm hauling lines.</b>		
Rungs: Delrin 100T High Tensile Plastic		
Centre/End Caps: Polyethylene LDPE & HDPE		
316 Marine Grade Stainless Steel Link Components		
Stainless Steel Fasteners Used Throughout		
SOLAS Certification		
Fixing Clips Breaking Load 3200kg		
Tensile tested in excess of one metric tonne (2,205lbs)		



**SOLAS  
APPROVED**

Schiffsausrüster  
**TOPLICHT**  
 Tel.: +49 (0)40 - 8890 100  
 www.toplicht.de